INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(54) Title: APPARATUS FOR ENCODING AND DISPENSING INTEGRATED CIRCUIT CHIP CARDS

(57) Abstract

The disclosed apparatus is a stand-alone integrated smart card circuit chip card (20) vending machine (10). It accepts bills in $1, $5, $10, $20 and $50 denominations and/or credit cards and issues stored value smart cards (20) for the value requested. It can also telephone a center to validate credit card transactions or send diagnostic and statistical reports. This invention has the capability to read and write to a card (20) while it is in the dispenser stack (24) therefore the card (20) has no value while in the dispenser and is not released until payment is received, that is, the cards (20) are encoded in real time before they are issued.

APPARATUS FOR ENCODING AND DISPENSING INTEGRATED CIRCUIT CHIP CARDS

RELATED APPLICATION

This is a continuation in part of U.S. Provisional Patent Application Serial No. 60/008,937 and entitled Smart Card Transaction System and Encoder-Dispenser filed December 20, 1995.

5

FIELD OF THE INVENTION

This invention relates to an integrated circuit smart card dispensing system that issues and/or adds value to stored value smart chip cards used as debit cards for purchasing consumables such as food and drinks as well as for buying services such as
10 telephone and laundry.

BACKGROUND OF THE INVENTION

This invention relates to the issuing or dispensing of stored
15 value smart chip cards from stand alone terminals that may be located in airports, arcades, shops, shopping malls and in places where the public may purchase these cards using cash or a credit card. Although there are a number of card dispensers on the market there are none that actually encode a smart chip card as it is
20 being dispensed. There are two basic types of smart card. The simplest is the memory or stored value card which is frequently a disposable magnetic strip card. The more complex smart card employs an integrated circuit and is basically a "PC on a card". Due to its security, these are used as credit cards replacing the
25 magnetic strip card.

Currently available telephone card dispensers issue stored value cards. The user must call a central facility to activate the card by its serial number which is sometimes referred to as "encoding before issue". These cards can be time consuming and
30 inconvenient to use.

The smart card was invented by the French company Innovatron in 1974 but was not widely used until the mid 1980's. It is basically a credit card size plastic card with one or more microchips embedded in it. They come in two basic types; first the

memory chip card which stores a number of units of value. As the card is used, the units are burned off the chip until they are all used up, then the card is thrown away. The second type is a reprogrammable microprocessor card, or "PC on a card". The price

5 of the card varies depending on the amount and type of memory it contains. Motorola, SGS Thomson and Siemens are the main chip manufacturers.

Pre-paid smart cards are widely accepted in banking and telephone applications in about every country in the world except

10 the USA. However, that is rapidly changing. One of the catalysts was the 1996 Olympics, with Visa, M/C and major banks rushing to place smart cards into service. The telephone industry is also installing smart card phones across the USA.

In 1993, the US phone companies introduced the "dial 800"

15 pre-paid telephone card to test the acceptance of debit cards. The "800" card has the advantage of being useable from any existing telephone, but has the disadvantage that the user has to dial many digits, i.e. the 800 number, a pin number followed by the number you wanted to dial in the first place. The user's debit account

20 is stored in a central computer owned by the phone company. In contrast, the "smart chip card" contains the account on the card and is much easier to use and has proved to be very secure since the smart card uses a crytogram. With many powerful PC's now available, magnetic cards are easy to duplicate and will likely

25 soon disappear from all applications requiring transaction security, such as credit cards.

With the volume of cards in use increasing there is a need for more secure methods for issuing or dispensing cards, whether they are smart cards or magnetic cards. Also, a more convenient

30 manner of dispensing and activating cards is required. Vending machines are presently available which issue uncoded cards. The user must then insert this card in a separate receptacle and code it for a desired value. This can be extremely annoying and confusing, particularly if the user is in a hurry or speaks a

35 foreign language. If the user removes the card but neglects to activate it, the card will be inoperable and the user may be frustrated or inconvenienced.

The present invention is not only a dispenser of cards, but also includes the capability to add value to a card already

2

purchased. There is a read/write head in the reader that performs the encoding of each card so that the cards have no value while they are released from the dispenser. Since the apparatus accepts currency, the enclosure or case is made of high security double
5 plated stainless steel with a triple locking mechanism that is drill proof.

SUMMARY OF INVENTION

It is therefore an object of the present invention to provide
10 an apparatus for encoding an integrated circuit chip card as the card is dispensed from a stack of uncoded cards.

It is a further object of this invention to provide a smart card vending machine that is safer, quicker, easier and less confusing to use than conventional machines.
15   This invention relates to an apparatus for encoding and dispensing integrated circuit chip cards. The apparatus includes an enclosure having a card dispensing slot and means for accepting a selected mode and amount of monetary payment. There are means mounted within the enclosure for holding a stack of uncoded
20 integrated chip cards such that an integrated circuit chip on each card faces toward a first end of the stack. An encoder mechanism is mounted within the enclosure and located adjacent the first end of the stack of cards. There are means carried by the enclosure for inputting data, including a selected monetary value. Means are
25 responsive to the means for accepting and the means for inputting for verifying that the selected monetary value corresponds to the accepted amount of monetary payment and for directing the encoder mechanism to encode the integrated circuit chip of a leading card positioned at the first end of the stack with the input data.
30 There are means for dispensing the leading card through the card dispensing slot after the leading card has been encoded and sequentially positioning a following card in the stack with its integrated circuit chip adjacent to the encoder mechanism.

In a preferred embodiment, the encoder mechanism includes a
35 smart card read/write head that is incorporated in a specially designed card dispenser to encode cards as they reach the bottom of the stack. Smart cards are stacked in the dispenser with the chip side face down. The 8 contacts of the read head are accurately placed in a standard position on each smart cart. The

3

design of the stack chute has a tolerance of 1 mm. The read/write head is then brought into contact with the 8 contacts of the chip during each card transaction so that information such as the card value can be immediately "written" or stored on the card before
5 its release.

    A comprehensive sequence of instructions are programmed into a microprocessor controller to control the operation and interaction between a bill acceptor, credit card reader, telephone transmission circuit board and the card dispensing unit.
10   A user follows simple instructions on the display. First, the user is instructed to "insert a bill or card" then a) dispense a new card, or b) add value to a card. The remaining instructions on the display instruct the user how to complete or cancel the transaction.
15

BRIEF DESCRIPTION OF THE DRAWINGS

    The invention is described in general with the aid of the following drawings:
    FIG. 1 is a perspective view of the encoding and dispensing
20 apparatus of this invention;
    FIG. 2 is a side, cross sectional view of the apparatus;
    FIG. 3 is an elevational side view of the card stacking, encoding and dispensing components;
    FIG. 4 is a side view of the apparatus showing a stack for
25 holding approximately 300 smart cards, the driving motor, pulleys, rollers and card transport;
    FIG. 5 shows the card encoding and transport mechanism in more detail including the read/write head, cantilever platform and the counter-rotating rollers that in combination with the cam
30 wheel assist the card movement from the card stacker to the user.
    FIG. 6 is a detailed bottom view of the card dispenser showing the "8 contact" read/write head illustrating the card holder or stack and card transport mechanism, and includes an inset showing the card ejection clutch, pulleys and photoeye;
35   FIG. 7A is a flow diagram describing a preferred process for identifying a bill and either dispensing a new card or adding value to an existing card by writing the value to the card before it is dispensed; and
    FIG. 7B is an alternative preferred flow diagram for

4

operating the microprocessor of the apparatus.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

5   This description will refer to FIGS. 1-7. The apparatus
consists of a number of interrelated parts that together form a
complete system for storing, encoding, adding value and
dispensing integrated circuit smart cards. The component parts
are a secure case or housing, bill acceptor, card

10 encoder/dispenser, micro-controller/processor, smart card
reader, display, keypad and power supply. There is an optional
telephone circuit board for validating credit cards and a small
receipt printer. All component parts are contained in the
stainless steel case 10 shown in FIG. 1.

15   Referring to FIGS. 1 and 2 it is noted that the case or
housing is rectangular in shape and is of a highly secure
design to deter theft and vandalism. It is fabricated using two
layers of 14 gauge stainless steel welded together to provide
an effective strength of 7 gauge. One case is effectively

20 "nested" inside the other. The top 12 of the case is sloped
forward so that no one can tie a chain or rope around it and
pull it off its wall mounting. The degree of slope of the top
surface also prevents anyone from placing a drink on top of the
case. All openings in the front of the case are of a size that

25 prevent access by a human hand. The case has no opening covers
in the front or on the side and is designed to mount flush
against a wall to reduce risk of prying off covers. The
complete front housing is one piece, and is hinged to a
reinforced backplate which also has reinforced mounting studs.

30 The front of the case has three small openings. Opening 14
accommodates the entry of currency. Opening 16 accepts a smart
card or credit card. Opening 18 allows for the exit of a coded
smart card from the dispenser. There is also a 40 character
display 20 for user instructions and a telephone type keypad 22

35 to allow a user to interact with the system.

     The smart card encoder/dispenser is shown in FIGS. 2-6. It
consists of a metal card holder or stack 24 having a card
capacity of approximately 300 cards. Holder 24 is precision
built to ensure the exact stacked alignment of smart cards 20

40 so that the bottom card is aligned, "chip side down", precisely

5

over the eight contacts 28 of a standard smart card read head
contact block B. The bottom of the card holder has a slot which
is approximately 1.5 times the thickness of a standard 30 mm
card. This slot is large enough to allow the card to pass
5 through during dispensing. A spring loaded, non-metallic
retainer is positioned such that the slot is covered during the
loading of cards and during the read/write cycle. The contact
block B is mounted on a cantilever platform P that is raised or
lowered by a solenoid A, under the control of a microcontroller
10 to enable reading and writing to a smart card. The base of the
card holder has a square hole in it to allow the read head
block B to protrude through the base and make precise contact
with the eight contracts of the chip 30 (FIG. 5) on the bottom
card 40. A physical stop limits the upward travel of platform P
15 to provide the correct compression of the contact springs and
to prohibit "lifting" of cards off the support structure. The
stop also ensures that the cards do not move during the
read/write cycle. To ensure firm contact and reliable reading
and writing to the chip, a force of approximately 4 Newtons is
20 required against the card. A one pound weight is placed on top
of the card stack to counteract this force and ensure that the
last remaining card in the stack 26 is properly read. An "out
of cards" sensor switch S1 determines if there is a card
present in the stack. A second switch S2 determines that a card
25 is present in the output chute, ready for removal by the user.

     The function and operation of the encoder/dispenser is
controlled by a sequence of instructions issued by a
microprocessor described in detail by the flow diagram shown in
FIG. 7A. The operation starts with a user inserting currency,
30 either a bill, coin, credit card or smart card. If a bill, coin
or a credit card has been inserted the process is as described
in the flow diagram at the "start" point. If a smart card is
inserted, the process flow starts at point A in the flow
diagram. At any time the user may cancel the transaction by
35 pressing the * key on the keypad. FIG. 7B illustrates another
preferred flow diagram for operating the apparatus.

     In either case, a leading or lowermost card 40 is released
from the card holder stack is as follows. Once the
microprocessor has completed the transaction by reading and/or

6

writing to the smart card, the card is ejected by the following
steps. The microprocessor first releases solenoid A, which
drops the platform P away from the card stack. The
microprocessor then commands a drive motor 42 to rotate in a
5   counter-clockwise direction (See FIG. 4) which causes counter-
rotation in both pulleys 2 and 3. Pulley 2 is integrally
connected to a small toothed gear through the use of a spring
loaded pin clutch C. The clutch is engaged by a solenoid D,
through a non-metallic yoke E, guided and moving axially along
10 a shaft F. As the clutch is engaged, a smaller gear G drives a
larger gear H in the opposite direction. This transfers rotary
motion to a small diameter bevel gear I. When meshed with the
larger diameter bevel gear J, gear I transmits rotary motion 90
degrees. This allows the attachment of a smaller diameter
15 "roller cam" K on the outer periphery of a driven support wheel
L. A bearing housing M contains the bearings to support a
"roller cam" wheel shaft, which also has two spring loaded
pins. These provide the friction necessary to a brake disk when
signaled by the photoeye N that the "roller cam" has made one
20 complete revolution. This signal also disengages the clutch
which stops rotation on the "roller cam" while allowing for
continued rotation of the motor and driven pulleys. As the
support wheel L rotates, the roller cam revolves through its
arc of travel to make contact with the rear edge of the bottom-
25 most card. This pushes the card forward where it is received by
the two counter-rotating friction drive wheels O. The drive
wheels are operated by a pair of non-metallic spur gears Q,
driven by pulley 3 and located opposite one another on the same
shaft R. Located above these gears and friction rollers is a
30 second set of gears and rollers S turning in the opposite
clockwise direction. This assures positive card ejection since
the upper set is spring loaded against the lower set with an
interference fit when there is no card present. As the card is
presented to the counter-rotating rollers, there is a "pivot
35 up" action to provide for card clearance while also providing
the necessary compression of the friction drive rollers onto
the moving card to move the card to the eject position. The
dual set of rollers effectively squeezes the card on top and
bottom while it is driven through the rollers. A second shaft U

7

on the upper pivoting drive assembly has an idler wheel V which
maintains the position of the card until it is removed by the
user. Also mounted on this shaft is a gate flapper W which
prevents the intrusion of any foreign objects such as a flat,
5 sharp knife that may otherwise be used to vandalize the
dispenser after the card has been removed.

    The card ejected switch S2 will sense the presence of a
card 40 and signal the user via display 20 to "take card". Once
the user has removed the card, switch S2 opens and the
10 microprocessor then resets the process to start another
transaction.

    In addition to the function of smart card dispensing the
following is a description of a unique process by which a set
of smart cards are used for "off-line" installation, setup,
15 diagnostics and data collection of the Smart Card Transaction
System or vending machine. Since the smart card is basically a
"PC on a card" setup and diagnostic information is programmed
onto a smart card and the card then used as an "off-line"
programming device to perform installation, setup and
20 diagnostic functions. One of the main advantages of such a
scheme over an on-line system is to prevent "hacking".

    This off-line "setup smart card" is programmed on a PC
using a smart card/PC interface and proprietary software. All
programming instructions that control the operation of the
25 Smart Card Transaction System are loaded onto the setup smart
card. After the Smart Card Transaction System has been mounted
or placed in its location and powered up, the setup card and a
password are used to initialize and/or setup the machine for
use. It is a simple two step process as follows: The first
30 time the Card Transaction System is powered up the display will
say "enter password". Upon receiving a valid password the
display will then say "insert setup card" followed by "setup
complete" if successful. If setup was unsuccessful a message
will be displayed to "run diagnostics. The "setup smart card"
35 contains diagnostic routines that guide a service engineer
through a series of diagnostic routines to determine the fault
status of the system which the engineer is trained to correct.

    The same setup card is also used to re-set a Card
Transaction System that has been tampered with to the extent

8

that the micro-processor memory went into "self destruct" or secure mode. By inserting the setup card and valid password a service engineer may restore the unit to service.

Another smart card, created in a similar manner to the
5 setup card just described is used for data collection. That is, the off-line collection of usage statistics, including but not limited to: the number and value of cards dispensed and the number and value of bills received.

In summary, the smart card transaction system is not only
10 a unique dispenser of smart cards it also uses smart cards for the various management functions described above.

Although specific features of the invention are shown in some drawings and not others, this is for convenience only, as each feature may be combined with any or all of the other features in
15 accordance with the invention. Other embodiments will occur to those skilled in the art and are within the following claims.

WHAT IS CLAIMED:

1.   An apparatus for encoding and dispensing integrated circuit chip cards comprising:

        an enclosure having a card dispensing slot and means for accepting a selected mode and amount of monetary payment;

        means mounted within said enclosure for holding a stack of uncoded integrated circuit chip cards such that an integrated circuit chip on each card faces forward a first end of said stack;

        an encoder mechanism mounted within said enclosure and located adjacent said first end of said stack of cards;

        means carried by said enclosure for inputting data, including a selected monetary value;

        means responsive to said means for accepting and said means for inputting, for verifying that said selected monetary value corresponds to said accepted amount of monetary payment and for directing said encoder mechanism to encode said integrated circuit chip of a leading card positioned at said first end of said stack with said input data; and

        ˉmeans for dispensing said leading card through said card dispensing slot after said leading card has been enclosed and sequentially positioning a following card in said stack with its integrated circuit chip adjacent to said encoder mechanism.

2.   The apparatus of claim 1 in which said means for verifying and directing includes a microprocessor.

3.   The apparatus of claim 1 in which said enclosure includes a sloped top surface.

4.   The apparatus of claim 1 in which said enclosure includes walls that comprise double plated stainless steel.

5.   The apparatus of claim 1 further including means, responsive to said means for verifying and directing, for urging said encoder mechanism into operable engagement with the chip on said leading card in said stack.

6.   The apparatus of claim 5 in which said means for urging includes a cantilevered platform mounted in said enclosure and supporting said encoder mechanism adjacent said leading card and means, responsive to said means for verifying and directing, for driving said platform such that said encoder mechanism and the chip on said leading card are operably interengaged when data is input and a corresponding monetary payment is accepted by said

10

apparatus.

     7.   The apparatus of claim 6 in which said means for driving includes a solenoid.
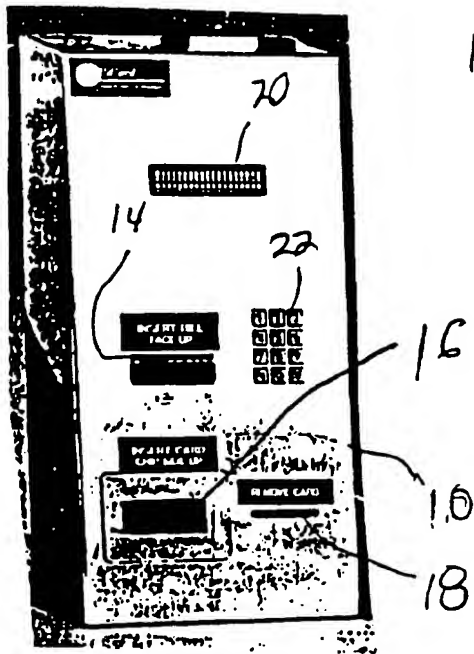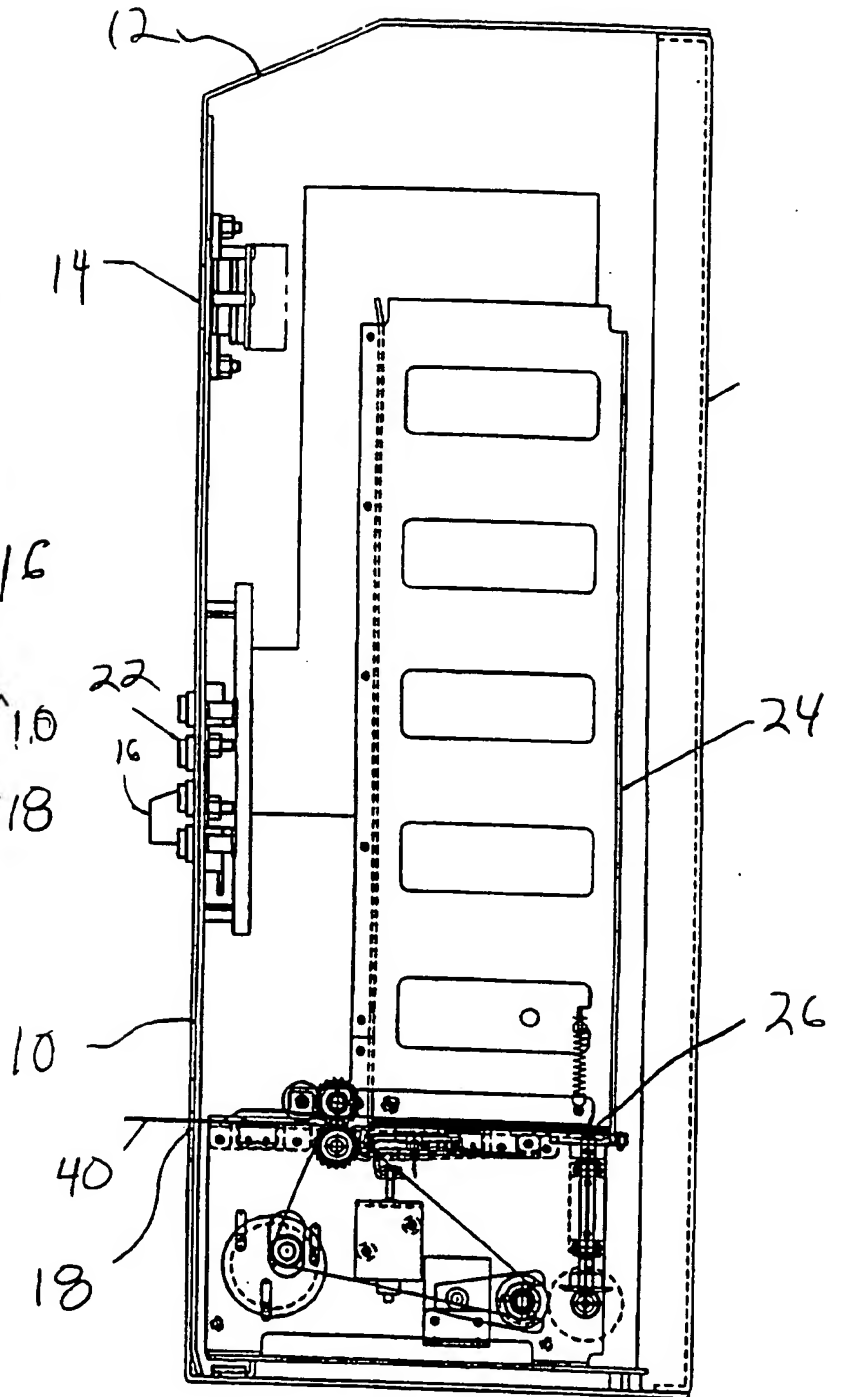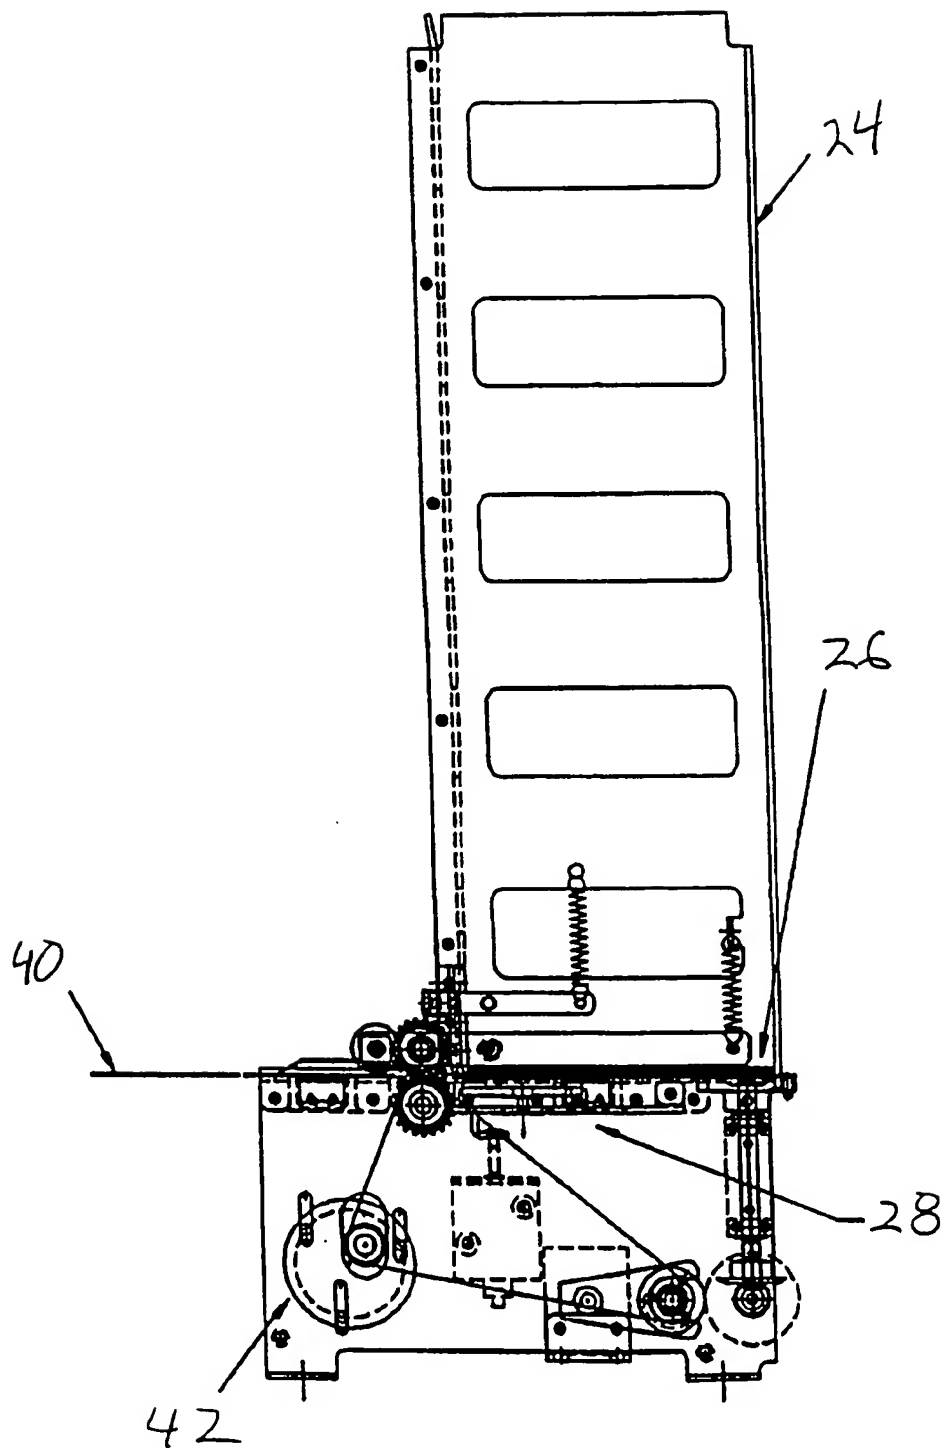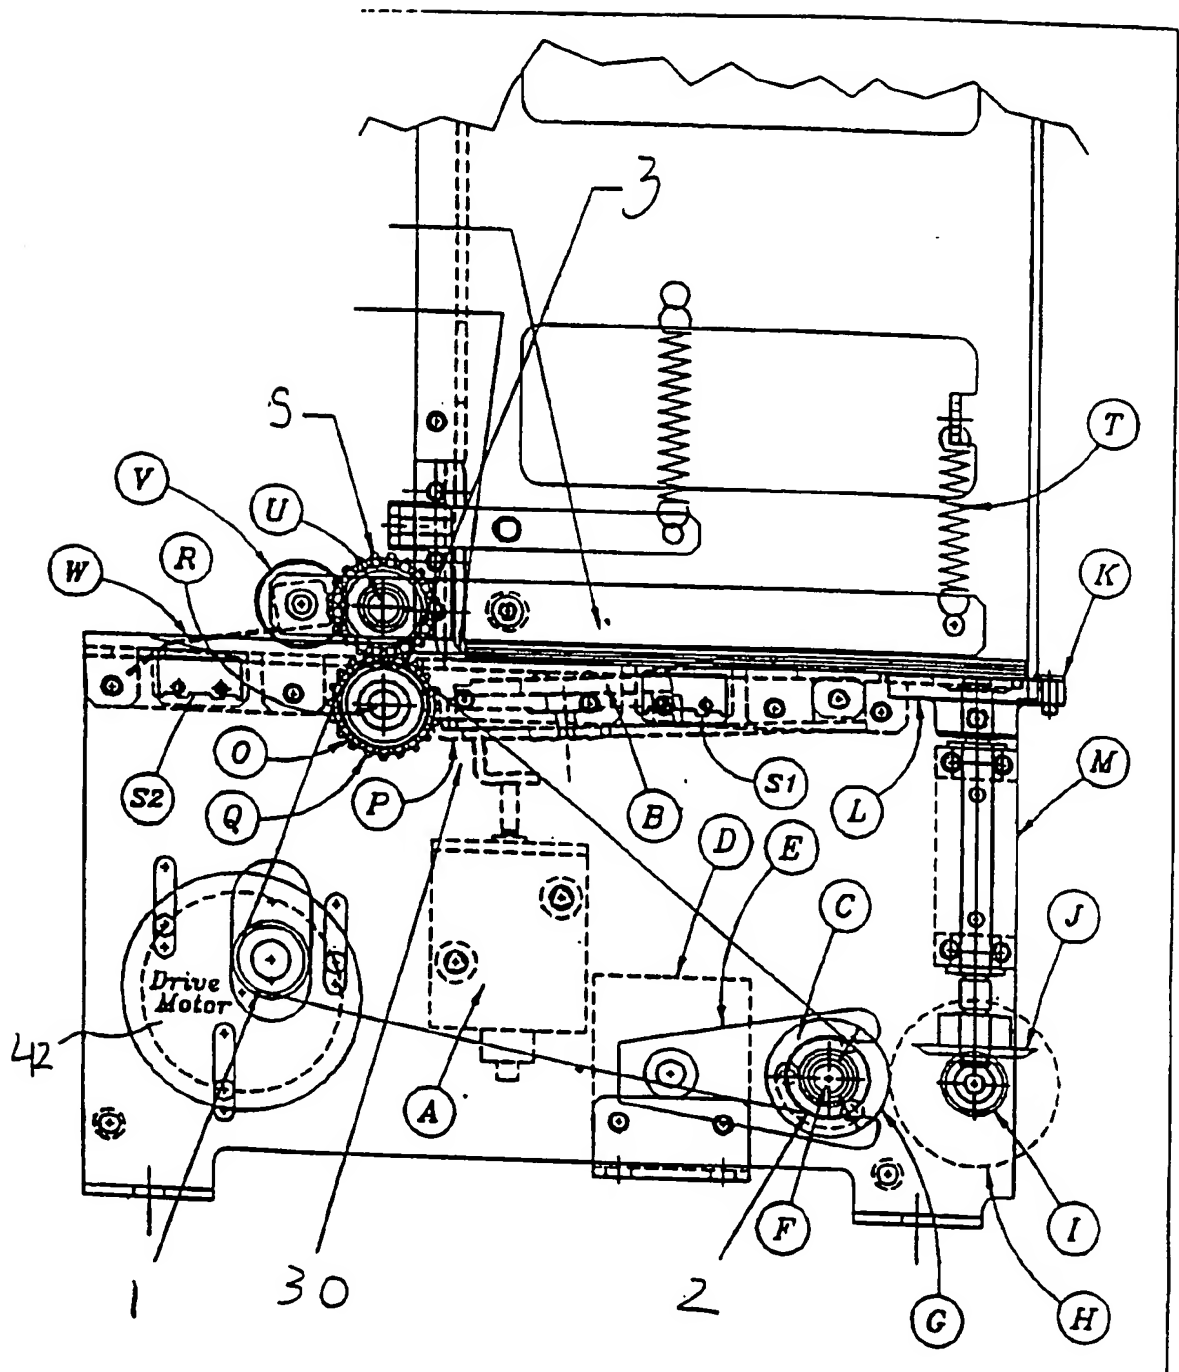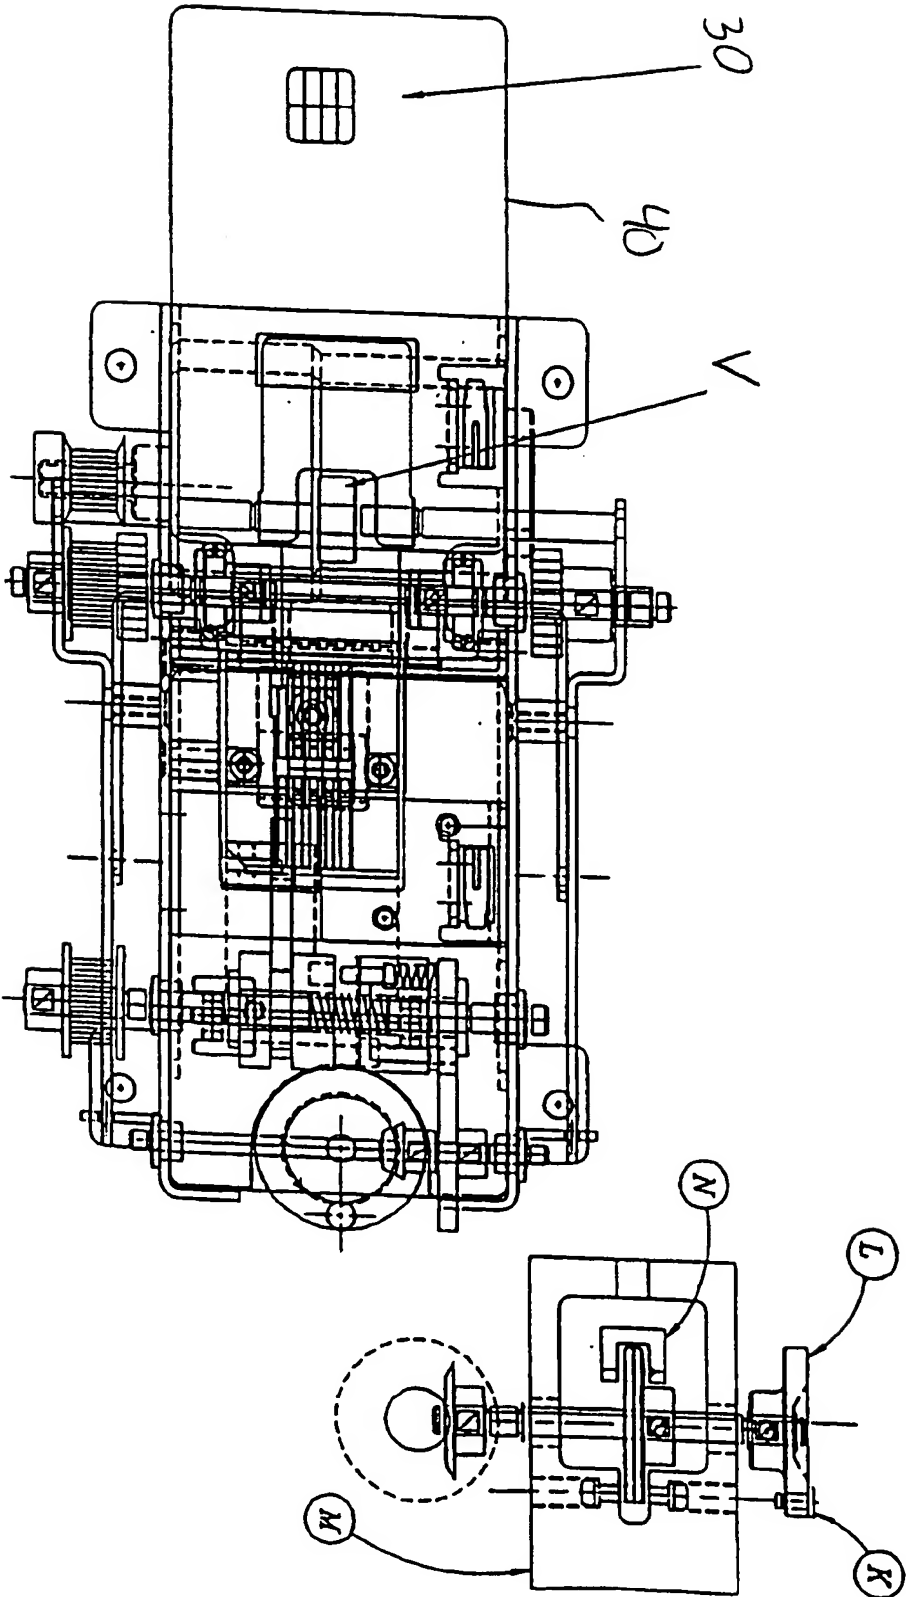
FIG 1

FIG 2

FIG 3

FIG4

FIG5

FIG6

6 / 7

FIG 7B
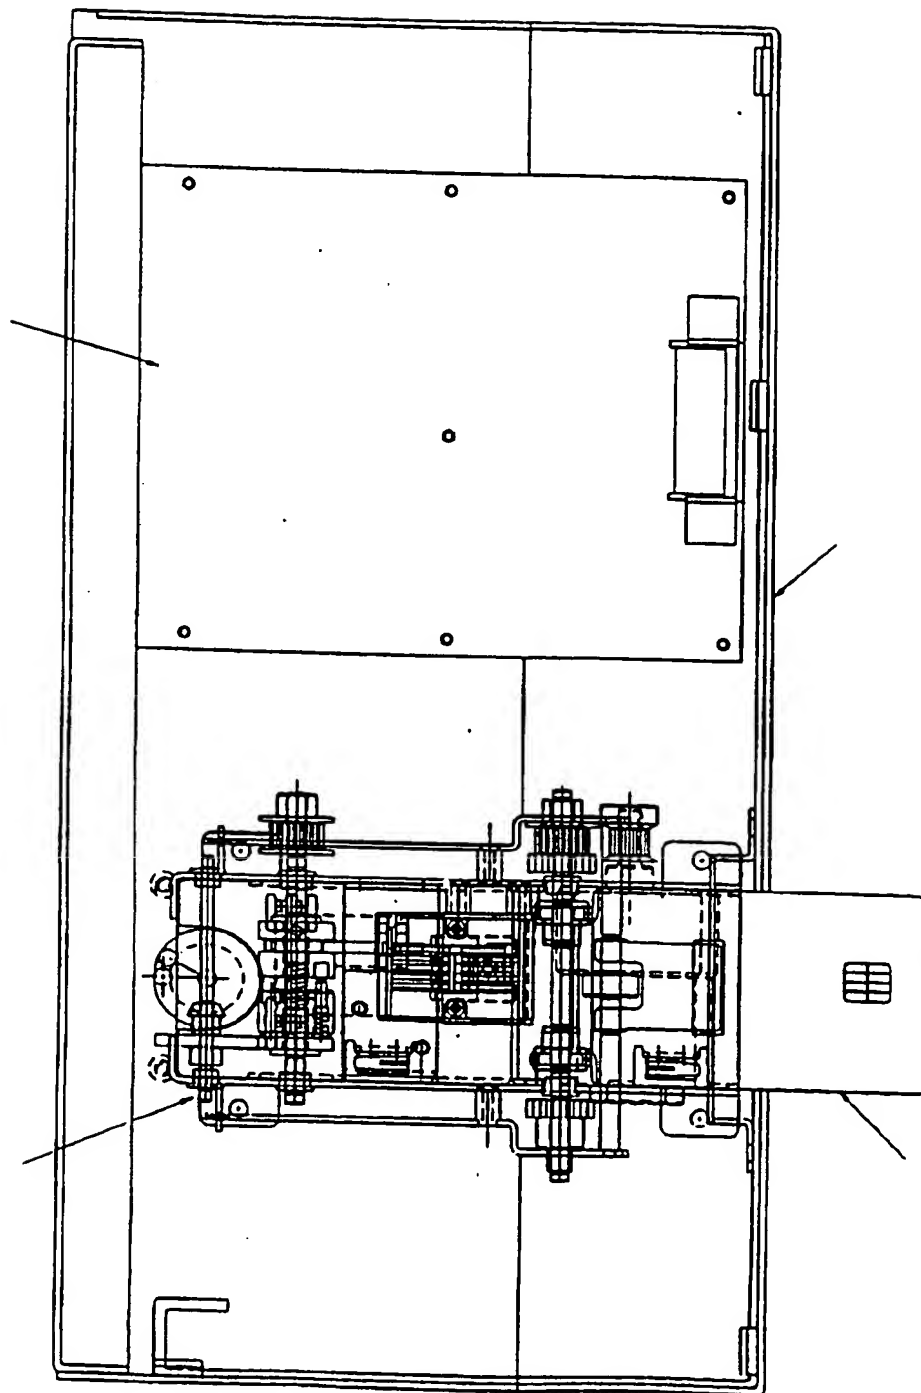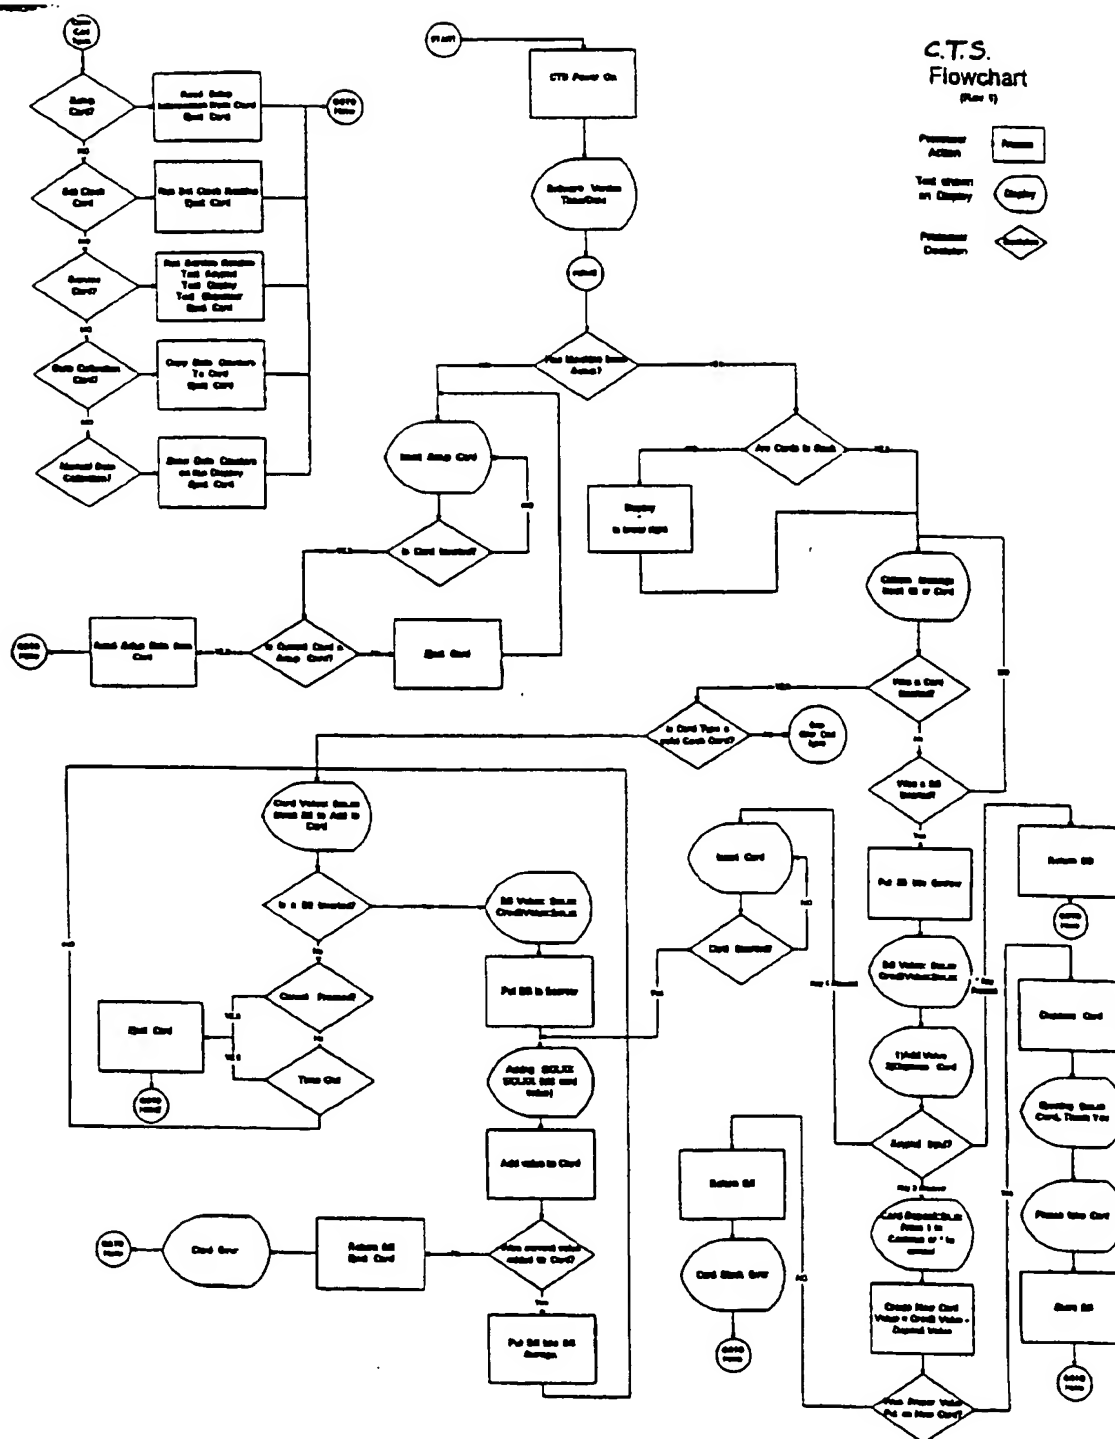
7 / 7

CAR' TRANSACTION SYSTEM.
FLOW DIAGRAM
(FIG 4)
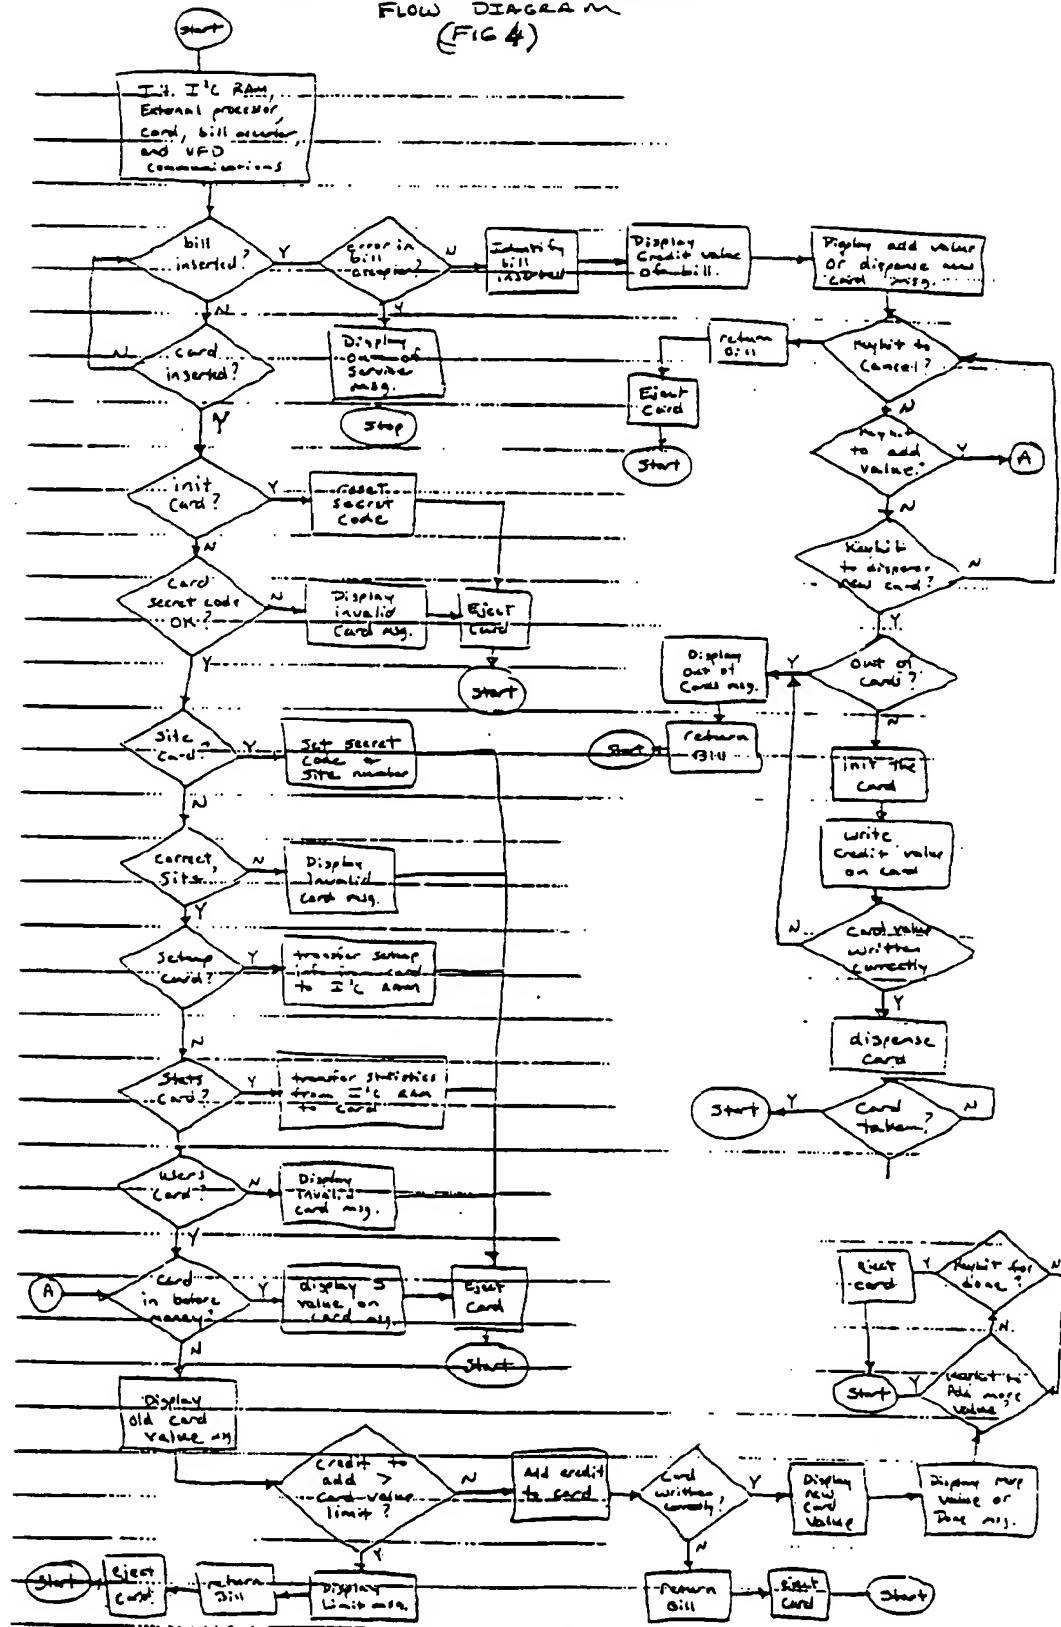
FIG 7A

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :GO6F 7/08
US CL :235/381

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.SCL:
235/381,384

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A, 4,965,437 (NAGAI) 23 OCTOBER 1992 SEE ENTIRE DOCUMENT	1-7
Y	US,A, 5,278,395 (BENRZET) 11 JANUARY 1994 SEE ENTIRE DOCUMENT	1-7
Y,P	US,A, 5,564,857 (LEE) 15 OCTOBER 1996 SEE ENTIRE DOCUMENT	1-7

☐ Further documents are listed in the continuation of Box C.   ☐ See patent family annex.

	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
13 MARCH 1997	**11 APR 1997**

Name and mailing address of the ISA/US	Authorized officer
Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	HAROLD PITTS
Facsimile No. (703) 305-3230	Telephone No. (703) 308-0717

Form PCT/ISA/210 (second sho3/22/04, EAST Version: 2.0.0.29